


ITEM TECHNICAL CARD

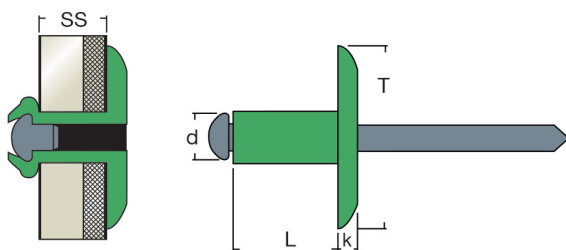

Lochdurchmesser (mm)	5,0
d - Blindnieten durchmesser	4,8
T - Kopfbreite (mm)	14,0
L - länge der niete (mm)	25,0
k - Kopf Dicke (mm)	1,7
Schiere Stärke (N)	2000
Zugbruchlast (N)	2500
Klemmbereich (mm)	17,0 ÷ 20,0
Körpermaterial	Aluminium
Nagelmaterial	Stahl
Kopftyp	gross

DESCRIZIONE \ DESCRIPTION:					CATEGORIA \ CATEGORY:		0013300.00250	
AFL14-Blind rivet Alu/Steel LH14 4,8x25,0 TL14								
MATERIAL \ MATERIAL:			TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:		 FASTENERS & TOOLS  RIVIT.IT	
ESEGUITO DA \ DRAWN BY:		DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:					
RIVIT								
CONTROLLATO DA \ CHECKED BY:		DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW			
RIVIT								
APPROVATO DA \ APPROVED BY:		DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET:	FORMATO FOGLIO:	A4	METODO 1 (ISO 128) METHOD 1 (ISO 128)	REVISIONE: REVISION:
RIVIT			1 OF 1	SHEET FORMAT:				
			PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07		