


ITEM TECHNICAL CARD

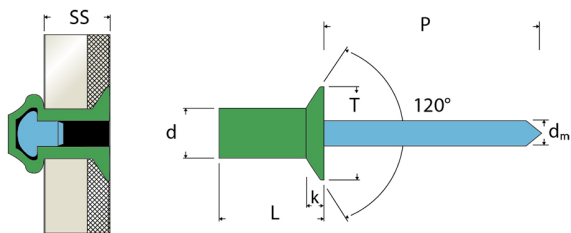

d - Body diameter (Ref.)	4,8
L - Body length (Ref.)	19,0
T - Head diameter (Ref.)	9,8
k - Head thickness (Ref.)	2,0
dm - Mandrel diameter (Ref.)	2,75
P - Mandrel protrusion (Ref.)	30
SS - Grip range (Ref.)	10,5 ÷ 14,0
Hole diameter (Ref.)	4,9
Shear load (Ref.)	2200
Tensile load (Ref.)	3100
Body material	Alulegierung
Mandrel material	Stainless A2
Standard of reference	ISO 15974:2003 (where applicable)
Type	Sealed rivet - Al./stainless A2 - Countersunk head

DESCRIZIONE \ DESCRIPTION: <b>SAIS-Sealed blind rivet Alu/Stainless steel 420 CS / KH9,5</b>				CATEGORIA \ CATEGORY: <b>0088300.00500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:			
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>	
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>		DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>	REVISIONE: REVISION:
				<b>FASTENERS &amp; TOOLS</b>  <b>RIVIT.IT</b>	