


ITEM TECHNICAL CARD



| | |
|-------------------------|------------|
| Lochdurchmesser (mm) | 5,8 - 6,2 |
| Durchmesser (mm) | M4 |
| Modell | RSCTO040 |
| L - länge (mm) | 8 |
| minimale Lochtiefe (mm) | 10,0 |
| A x h (mm) | 6,5 x 0,75 |
| a x h (mm) | 4,0 x 0,7 |

| | | | |
|---|-------|--|---|
| DESCRIZIONE \ DESCRIPTION: RSCT-O-Brass self tapping socket h.5,8-6,2 - de.6,5 - h .8,0 | | CATEGORIA \ CATEGORY: 0344700.05000 | |
| MATERIAL \ MATERIAL: | | TRATTAMENTO TERMICO \ HEAT TREATMENT: | NOTE \ NOTES: |
| ESEGUITO DA \ DRAWN BY: RIVIT | DATA: | TRATT. SUPERFICIALE \ SURF. TREATMENT: | Rugosità superficiale generale: General surface roughness: |
| CONTROLLATO DA \ CHECKED BY: RIVIT | DATA: | PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]: | NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW |
| APPROVATO DA \ APPROVED BY: RIVIT | DATA: | DUREZZA \ HARDNESS: | METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION: |
| | | PESO \ WEIGHT: | CARTIGLIO \ FORMAT Mod.P023_07 |

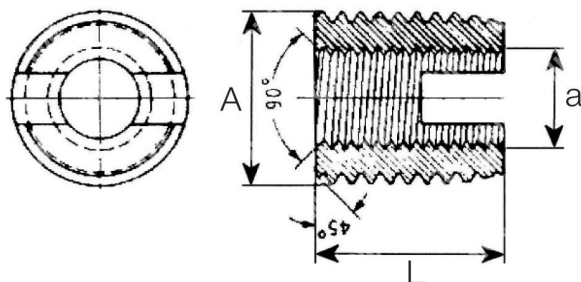

**FASTENERS
& TOOLS**
RIVIT.IT