

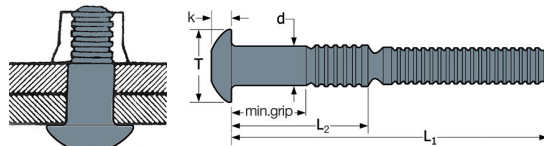




ITEM TECHNICAL CARD



Lochdurchmesser (mm)	6,6 - 6,8
durchmesser der bolzen (mm)	6,4
T - Kopfbreite (mm)	13,4
L1 - Bolzenlänge (mm)	55,0
L2 (mm)	24,2 - 25,9
K - épaisseur de la tête (mm)	3,9
Schiere Stärke (N)	13500
Modell	RLFT08-10
Zugbruchlast (N)	13300
Klemmbereich (mm)	14,3 ÷ 17,5

DESCRIZIONE \ DESCRIPTION: <b>RIVLOCK-Lockbolt Steel d.6,4 gr 14,3-17,5 DH RLFT 8-10 d6,4</b>			CATEGORIA \ CATEGORY: <b>0352200.00200</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>	
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
			 	
			 <b>FASTENERS &amp; TOOLS</b>  <b>RIVIT.IT</b>	