


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	4,9/5,1
d - Blindnieten durchmesser	4,8
T - Kopfbreite (mm)	14,0
L - länge der niete (mm)	11,5
L1 (mm)	14,7
k - Kopf Dicke (mm)	2,0
Schiere Stärke (N)	6000
Zugbruchlast (N)	3500
Klemmbereich (mm)	3,5 ÷ 6,0
Körpermaterial	Stahl
Nagelmaterial	Stahl
Kopftyp	gross

DESCRIZIONE \ DESCRIPTION: LOCKRIV14-Blind rivet Steel/Steel gr 3,5-6,0 LH14 4,8x11,5 TL14		CATEGORIA \ CATEGORY: 1924900.03000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: Mod.P023_07

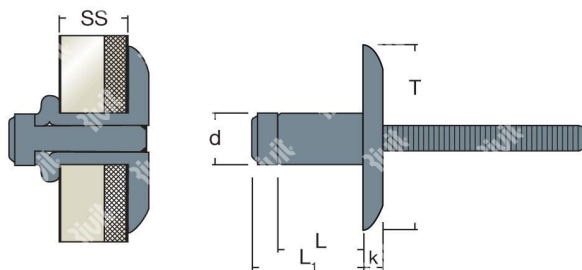

FASTENERS & TOOLS
RIVIT.IT