


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	6,0 - 6,2
Durchmesser (mm)	M4
Modell	RSCFFL040
L - länge (mm)	8
minimale Lochtiefe (mm)	10,0
A x h (mm)	6,5 x 0,8
a x h (mm)	4,0 x 0,7

DESCRIZIONE \ DESCRIPTION: <b>RSCF-F-Self tapping socketGalv. Steel w/hole f.10 M4x0,7x8 - 0318L</b>		CATEGORIA \ CATEGORY: <b>2791000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: <b>1 OF 1</b>	
		FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	
		CARTIGLIO \ FORMAT <b>Mod.P023_07</b>	

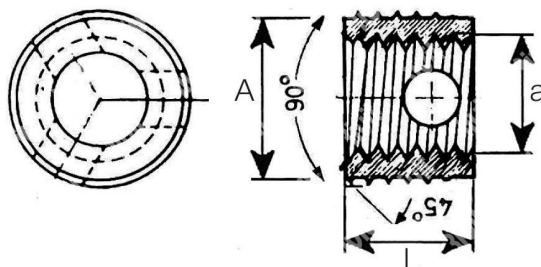

**FASTENERS  
& TOOLS**  
RIVIT.IT