


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	13,1 - 13,5
Durchmesser (mm)	M10
Modell	RSCFFL100
L - länge (mm)	18
minimale Lochtiefe (mm)	22,0
A x h (mm)	14,0 x 1,5
a x h (mm)	10,0 x 1,5

DESCRIZIONE \ DESCRIPTION: <b>RSCF-F-Self tapping socketGalv. Steel w/hole f.22 M10x1,5x18</b>		CATEGORIA \ CATEGORY: <b>2791600</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: <b>1 OF 1</b>	
		FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	
		CARTIGLIO \ FORMAT <b>Mod.P023_07</b>	

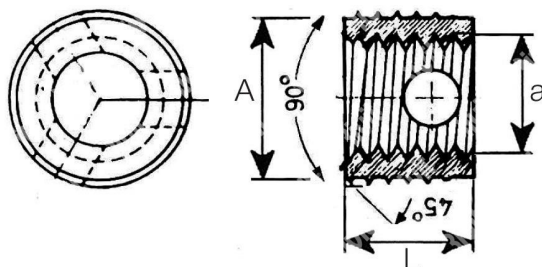

**FASTENERS  
& TOOLS**  
RIVIT.IT