


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	5,0 - 5,2
durchmesser der bolzen (mm)	4,8
T - Kopfbreite (mm)	10,0
L1 - Bolzenlänge (mm)	49,5
L2 (mm)	20,3 - 22,0
K - épaisseur de la tête (mm)	3,2
Schiere Stärke (N)	10800
Modell	RLFT06-09
Zugbruchlast (N)	9700
Klemmbereich (mm)	12,7 ÷ 15,9

DESCRIZIONE \ DESCRIPTION: <b>RIVLOCK-Lockbolt Steel d.4,8 gr 12,7-15,9 DH RLFT 6-9 d4,8</b>		CATEGORIA \ CATEGORY: <b>3332300</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b>

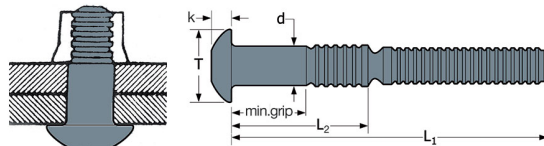

**FASTENERS  
& TOOLS**  
RIVIT.IT