


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	8,2 - 8,4
durchmesser der bolzen (mm)	8,0
T - Kopfbreite (mm)	16,7
L1 - Bolzenlänge (mm)	67,5
L2 (mm)	34,1 - 35,7
K - épaisseur de la tête (mm)	5,2
Schiere Stärke (N)	29800
Modell	RLFT10-14
Zugbruchlast (N)	26700
Klemmbereich (mm)	19,1 ÷ 25,4

DESCRIZIONE \ DESCRIPTION: RIVLOCK-Lockbolt Steel d.8,0 gr 19,1-25,4 DH RLFT 10-14 d8		CATEGORIA \ CATEGORY: 3334400.00100	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: Mod.P023_07

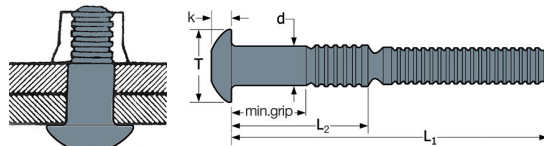

**FASTENERS
& TOOLS**
RIVIT.IT