


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	9,8 - 10,0
durchmesser der bolzen (mm)	9,6
T - Kopfbreite (mm)	20,0
L1 - Bolzenlänge (mm)	73,5
L2 (mm)	35,5 - 37,3
K - épaisseur de la tête (mm)	6,4
Schiere Stärke (N)	29000
Modell	RLXT12-14
Zugbruchlast (N)	37000
Klemmbereich (mm)	19,1 ÷ 25,4

DESCRIZIONE \ DESCRIPTION: <b>RIVLOCK-Lockbolt Stainless/s d.10,0 gr.19,1-25,4 25,4 DH RLXT 12-</b>		CATEGORIA \ CATEGORY: <b>3420800.00100</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b>

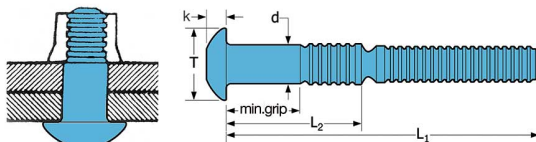

**FASTENERS  
& TOOLS**  
RIVIT.IT