



ITEM TECHNICAL CARD

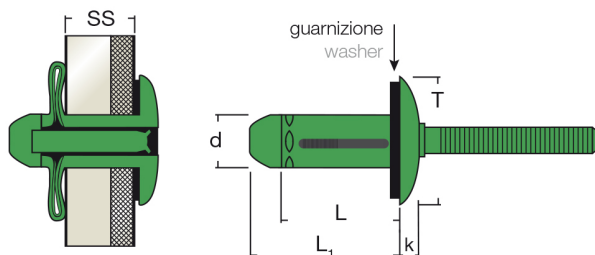

Lochdurchmesser (mm)	8,0
d - Blindnieten durchmesser	7,7
T - Kopfbreite (mm)	19,0
L - länge der niete (mm)	28,2
L1 (mm)	32,7
k - Kopf Dicke (mm)	5,3
Schiere Stärke (N)	5300
Zugbruchlast (N)	4300
Klemmbereich (mm)	1,1 ÷ 9,5
Körpermaterial	Aluminium
Nagelmaterial	Aluminium
Kopftyp	gross

DESCRIZIONE \ DESCRIPTION: GTRERIV19-Blind rivet Alu/Alu + gasket gr 2,0-9,5 LH19 7,7x28,2		CATEGORIA \ CATEGORY: 4393900.00800	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: RIVIT		TRATT. SUPERFICIALE \ SURF. TREATMENT:	
DATA:		Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	
APPROVATO DA \ APPROVED BY: RIVIT		DUREZZA \ HARDNESS:	
FOGLIO \ SHEET: 1 OF 1		FORMATO FOGLIO: SHEET FORMAT: A4	
PESO \ WEIGHT:		Scale \ SCALE:	
CARTIGLIO \ FORMAT Mod.P023_07		METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION: 	
 FASTENERS & TOOLS RIVIT.IT			