


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	5,0
d - Blindnieten durchmesser	4,8
T - Kopfbreite (mm)	9,5
L - länge der niete (mm)	16,0
Schiere Stärke (N)	4500
Zugbruchlast (N)	5300
Klemmbereich (mm)	9,5 ÷ 11,0
Körpermaterial	Edelstahl A2
Nagelmaterial	Edelstahl A2
Kopftyp	Senkkopf

DESCRIZIONE \ DESCRIPTION: <b>IISA2-Blind rivet Stainless steel 304/Stainless st h.5,0 CSK 4,8x16,0</b>		CATEGORIA \ CATEGORY: <b>4616300.00500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b>

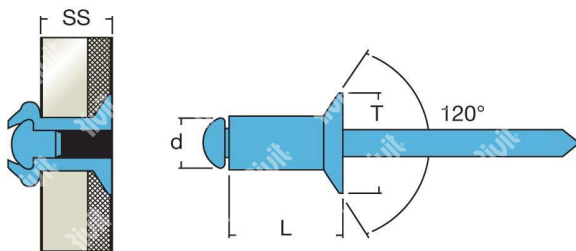

**FASTENERS & TOOLS**  
RIVIT.IT