
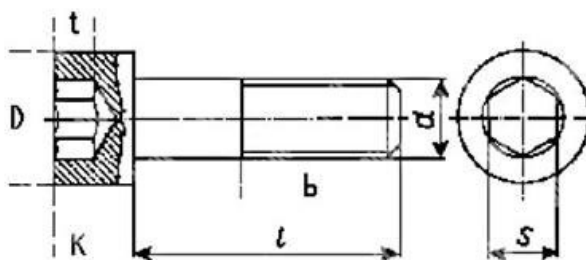



ITEM TECHNICAL CARD



Länge (mm)	30,0
C max (mm)	5,09
Material	weiß verzinkter Stahl C15
Durchmesser	M5
pitch	0,8
DIN	7500E
ISO	15480
k (mm)	5,0
S (mm)	4
d1 (mm)	8,5

DESCRIZIONE \ DESCRIPTION: <b>Hex socket head Taptite screw DIN7500E white zinc plated - Baked +</b>		CATEGORIA \ CATEGORY: <b>56888ZB.02500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b> FORMATO FOGLIO: <b>A4</b> SHEET FORMAT: <b>A4</b>
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b> CARTIGLIO \ FORMAT
			METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
			
			 <b>FASTENERS &amp; TOOLS</b> RIVIT.IT