


ITEM TECHNICAL CARD



Lochdurchmesser (mm)	6,6/6,8
d - Blindnieten durchmesser	6,4
T - Kopfbreite (mm)	10
L - länge der niete (mm)	27,5
L1 (mm)	31,5
k - Kopf Dicke (mm)	2
Schiere Stärke (N)	5000
Zugbruchlast (N)	3500
Klemmbereich (mm)	18,8 ÷ 21,8
Körpermaterial	Aluminium
Nagelmaterial	Aluminium
Kopftyp	Senkkopf

DESCRIZIONE \ DESCRIPTION: LOCKRIV-Rivetto Alluminio/Alluminio TS ss19,8-21,8 6,4x27,5		CATEGORIA \ CATEGORY: 5729500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: Mod.P023_07

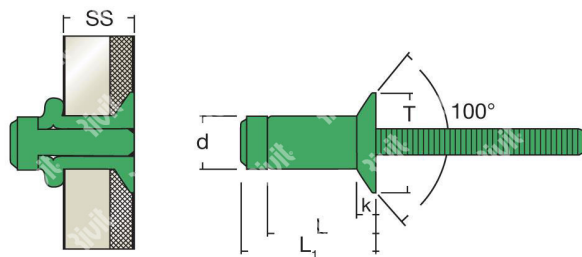

FASTENERS & TOOLS
RIVIT.IT