


ITEM TECHNICAL CARD

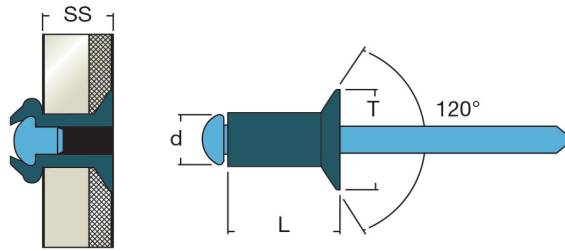

hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	9,5
L - rivet length (mm)	25,0
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	17,0 ÷ 20,0
body material	cupronickel
mandrel material	stainless steel A2
head type	countersunk

DESCRIZIONE \ DESCRIPTION: XIS-Blind rivet Cupronickel/Stainless steel 304 CS KH9,0 4,8x25,0		CATEGORIA \ CATEGORY: 0037300.00500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1 FORMATO FOGLIO: A4 SHEET FORMAT: A4
		PESO \ WEIGHT:	Scale \ SCALE: Mod.P023_07
		METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION: 	
		FASTENERS & TOOLS RIVIT.IT	