




ITEM TECHNICAL CARD

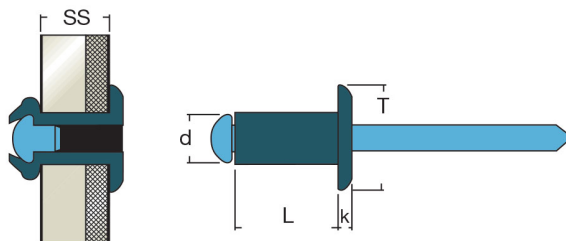

hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	9,5
L - rivet length (mm)	9,0
k - head thickness (mm)	1,1
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	2,0 ÷ 4,0
body material	cupronickel
mandrel material	stainless steel A2
head type	dome

DESCRIZIONE \ DESCRIPTION: <b>XIT-Blind rivet Cupronickel/Stainless steel 304 DH 4,8x9,0</b>				CATEGORIA \ CATEGORY:		<b>0038600.00500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:			
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:				
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>				
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	METODO 1 (ISO 128) METHOD 1 (ISO 128)	REVISIONE: REVISION:	  <b>FASTENERS &amp; TOOLS</b>  <b>RIVIT.IT</b>
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>	