


ITEM TECHNICAL CARD



hole diameter (mm)	4,1
d - rivet diameter	4,0
T - head width (mm)	8,0
L - rivet length (mm)	12,0
shear strength (N)	1500
tensile strength (N)	2100
grip range (mm)	6,5 ÷ 8,0
body material	aluminium
mandrel material	steel
head type	countersunk

DESCRIZIONE \ DESCRIPTION: SAFS-Sealed blind rivet Alu/Steel CSKH8,0 4,0x12,0				CATEGORIA \ CATEGORY: 0085800.01000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

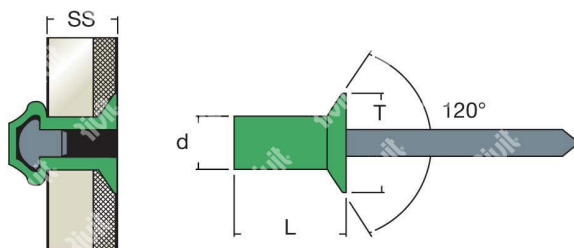

FASTENERS & TOOLS
RIVIT.IT