


ITEM TECHNICAL CARD




T - head width (mm)	15,5
L2 - shank length after fixing (mm)	11,0 ÷ 13,0
L - rivet nuts lenght (mm)	28,0
k - head thickness (mm)	1,5
grip range (mm)	6,5 ÷ 9,0
axial proof load for thread (N)	32000
max clamping torque (Nm)	32.0
d - rivet nut pitch	M10
hole diameter	13,0
clamping torque for torque force (Nm)	8.5
shearing strength (N)	5000
body material	steel

DESCRIZIONE \ DESCRIPTION: FSC-Rivsert Steel h.13,0 gr6,5-9,0 CSKH M10/090				CATEGORIA \ CATEGORY: 0305700.00100	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:			
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 2	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

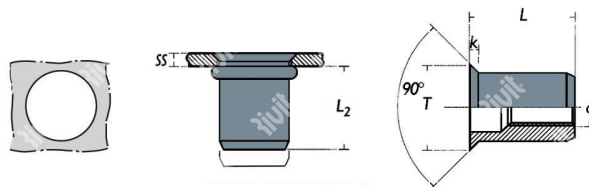

**FASTENERS
& TOOLS**
RIVIT.IT

ITEM TECHNICAL CARD

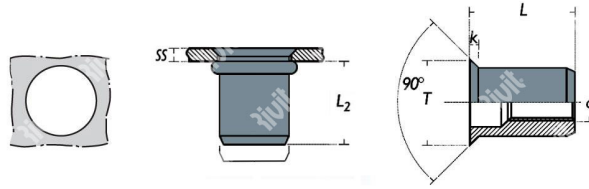

head type	countersunk
shank type	open cylindrical

DESCRIZIONE \ DESCRIPTION: FSC-Rivsert Steel h.13,0 gr6,5-9,0 CSKH M10/090				CATEGORIA \ CATEGORY: 0305700.00100	
MATERIALE \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 2 OF 2	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	



**FASTENERS
& TOOLS**
RIVIT.IT