


ITEM TECHNICAL CARD

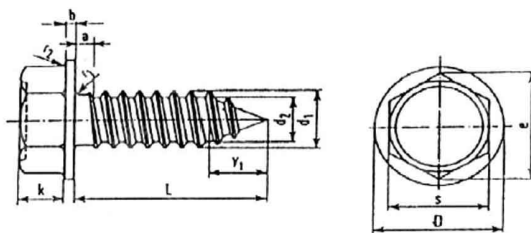

length (mm)	19,0
Diameter	5,5
pitch	1,8
UNI	6950
DIN	3928
k (mm)	4,15
S (mm)	8,0
b (mm)	1,0
Rules Description	hexagon head tapping screws with collar
e min (mm)	8,71
d1 min (mm)	10,0
d1 max (mm)	11,0

DESCRIZIONE \ DESCRIPTION: Self-tapping screw UNI 6950 flanged hexagon head white zinc plated			CATEGORIA \ CATEGORY: 03128ZB.00500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
				METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
				FASTENERS & TOOLS RIVIT.IT