


ITEM TECHNICAL CARD



hole diameter (mm)	5,0 - 5,2
lockbolt diameter (mm)	4,8
T - head width (mm)	10,0
L1 - lockbolt length (mm)	48,0
L2 (mm)	18,7 - 20,4
K - head thickness (mm)	3,2
shear strenght (N)	10800
model	RLFT06-08
tensile strenght (N)	9700
grip range (mm)	11,1 ÷ 14,3

DESCRIZIONE \ DESCRIPTION: RIVLOCK-Lockbolt Steel d.4,8 gr 11,1-14,3 DH RLFT 6-8 d4,8			CATEGORIA \ CATEGORY: 0351500.00200	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	
		PESO \ WEIGHT:	Scale \ SCALE:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
			CARTIGLIO \ FORMAT Mod.P023_07	REVISIONE: REVISION:

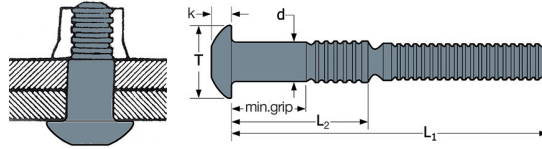

**FASTENERS
& TOOLS**
RIVIT.IT