


ITEM TECHNICAL CARD



diámetro vite	M6
E (mm)	0,45
G (mm)	6,0
tipo	DGQFX836DX
A (mm)	12,2
C (mm)	11,5
B (mm)	12,0
s - spessore lamiera (mm)	3,6 - 4,5
D (mm)	7,2
foro lamiera (mm)	8,3x8,3
F (mm)	12,5

DESCRIZIONE \ DESCRIPTION:				CATEGORIA \ CATEGORY:		0762700.04000			
DadoFE Gab.OX ss3,6-4,5 a.8,3x8,3(836DX) M6									
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:				NOTE \ NOTES:			
ESEGUITO DA \ DRAWN BY:		DATA:		TRATT. SUPERFICIALE\ SURF. TREATMENT:				Rugosità superficiale generale: General surface roughness:	
RIVIT									
CONTROLLATO DA \ CHECKED BY:		DATA:		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW			
RIVIT									
APPROVATO DA \ APPROVED BY:		DATA:		DUREZZA \ HARDNESS:		Foglio \ SHEET:			
RIVIT						1 OF 1			
				FORMATO FOGLIO: SHEET FORMAT:		A4			
				METODO 1 (ISO 128) METHOD 1 (ISO 128)		REVISIONE: REVISION:			
				PESO \ WEIGHT:		Scale \ SCALE:			
				CARTIGLIO \ FORMAT		Mod.P023_07			

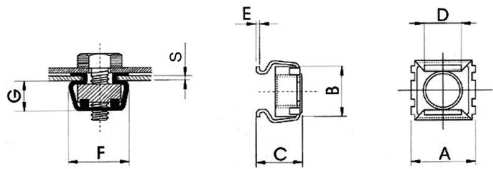

FASTENERS
& TOOLS



RIVIT.IT