
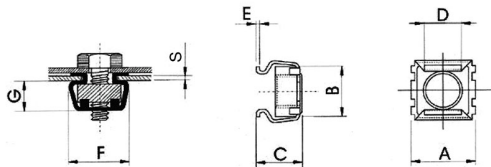


ITEM TECHNICAL CARD



diámetro vite	M6
E (mm)	0,45
G (mm)	6,0
tipo	DGQFX836BX
A (mm)	12,2
C (mm)	9,5
B (mm)	12,0
s - spessore lamiera (mm)	1,7 - 2,5
D (mm)	7,2
foro lamiera (mm)	8,3x8,3
F (mm)	12,5

DESCRIZIONE \ DESCRIPTION:					CATEGORIA \ CATEGORY:		0763000.02500		
DadoFE Gab.OX ss1,7-2,5 a.8,3x8,3(836BX) M6									
MATERIAL \ MATERIAL:			TRATTAMENTO TERMICO \ HEAT TREATMENT:			NOTE \ NOTES:			
ESEGUITO DA \ DRAWN BY:		DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:				
RIVIT									
CONTROLLATO DA \ CHECKED BY:		DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:			NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW			
RIVIT									
APPROVATO DA \ APPROVED BY:		DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET:	FORMATO FOGLIO:	METODO 1 (ISO 128) METHOD 1 (ISO 128)			REVISIONE: REVISION:
RIVIT				1 OF 1	SHEET FORMAT:	A4			
			PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT				
					Mod.P023_07				
									