


ITEM TECHNICAL CARD

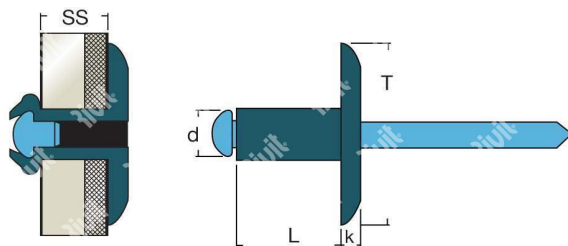

hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	13,0
L - rivet length (mm)	18,0
k - head thickness (mm)	1,8
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	14,0 ÷ 16,0
body material	cupronickel
mandrel material	stainless steel A2
head type	large

DESCRIZIONE \ DESCRIPTION: XIL13-Blind rivet Cupronickel/Stainless steel 304 LH13 4,8x20,0 TL13		CATEGORIA \ CATEGORY: 1084900.02500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
NOTE \ NOTES:		Rugosità superficiale generale: General surface roughness:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	Foglio \ SHEET: 1 OF 1 FORMATO FOGLIO: A4 SHEET FORMAT: A4
PESO \ WEIGHT:		Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
		FASTENERS & TOOLS RIVIT.IT	