


ITEM TECHNICAL CARD

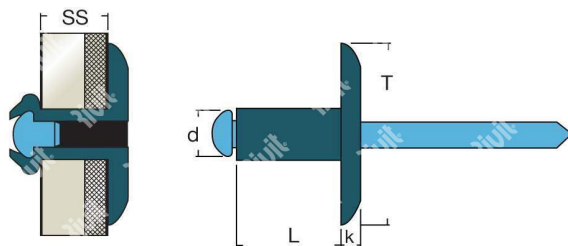

hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	13,0
L - rivet length (mm)	12,0
k - head thickness (mm)	1,8
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	5,0 ÷ 7,0
body material	cupronickel
mandrel material	stainless steel A2
head type	large

DESCRIZIONE \ DESCRIPTION: <b>XIL13-Blind rivet Cupronickel/Stainless steel 304 LH13 4,8x12,0 TL13</b>		CATEGORIA \ CATEGORY: <b>1086300.00500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
NOTE \ NOTES:		Rugosità superficiale generale: General surface roughness:	
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FUOGIO \ SHEET: <b>1 OF 1</b> FORMATO FOGGIO: <b>A4</b> SHEET FORMAT: <b>A4</b>
PESO \ WEIGHT:		Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
		<b>FASTENERS &amp; TOOLS</b>  <b>RIVIT.IT</b>	