
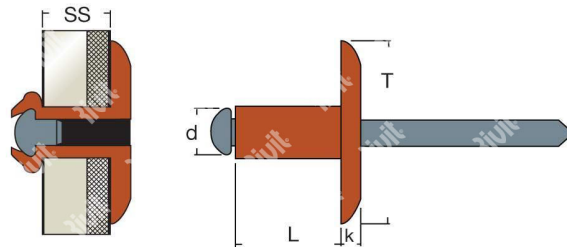



ITEM TECHNICAL CARD



hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	14,0
L - rivet length (mm)	12,0
k - head thickness (mm)	1,8
shear strength (N)	1800
tensile strength (N)	2400
grip range (mm)	5,0 ÷ 7,0
body material	copper
mandrel material	steel
head type	large

DESCRIZIONE \ DESCRIPTION: <b>RFL14-Blind rivet Copper/Steel LH14 4,8x12,0 TL14</b>			CATEGORIA \ CATEGORY: <b>1189700.03000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>	
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
				METODO 1 (ISO 128) METHOD 1 (ISO 128)
				REVISIONE: REVISION:
				
				 <b>FASTENERS &amp; TOOLS</b> RIVIT.IT