


ITEM TECHNICAL CARD

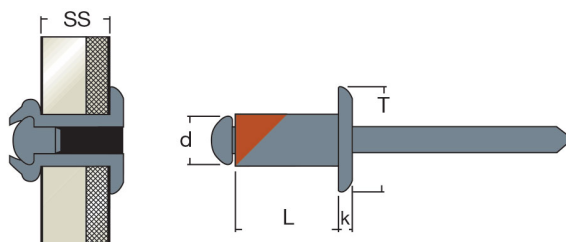

hole diameter (mm)	4,0
d - rivet diameter	3,9
T - head width (mm)	8,0
L - rivet length (mm)	14,0
k - head thickness (mm)	1,0
shear strength (N)	1200
tensile strength (N)	1700
grip range (mm)	8,0 ÷ 10,0
body material	zinc coated copper
mandrel material	steel
head type	dome

DESCRIZIONE \ DESCRIPTION: RZFT-Blind rivet Zinc plated Copper/Steel DH 3,9x14,0			CATEGORIA \ CATEGORY: 1201800.00500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
				METODO 1 (ISO 128) METHOD 1 (ISO 128)
				REVISIONE: REVISION:
				FASTENERS & TOOLS RIVIT.IT