


ITEM TECHNICAL CARD

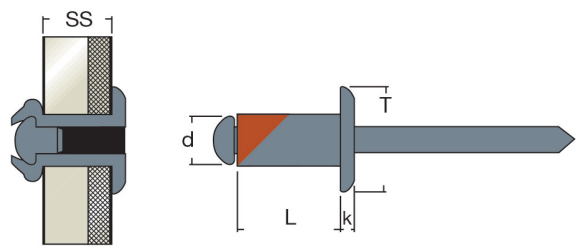

hole diameter (mm)	4,0
d - rivet diameter	3,9
T - head width (mm)	8,0
L - rivet length (mm)	14,0
k - head thickness (mm)	1,0
shear strength (N)	1200
tensile strength (N)	1700
grip range (mm)	8,0 ÷ 10,0
body material	zinc coated copper
mandrel material	steel
head type	dome

DESCRIZIONE \ DESCRIPTION:					CATEGORIA \ CATEGORY:		1201800.06000		
RZFT-Blind rivet Zinc plated Copper/Steel DH 3,9x14,0									
MATERIAL \ MATERIAL:			TRATTAMENTO TERMICO \ HEAT TREATMENT:			NOTE \ NOTES:			
ESEGUITO DA \ DRAWN BY:		DATA:	TRATT. SUPERFICIALE\ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:				
RIVIT									
CONTROLLATO DA \ CHECKED BY:		DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:			NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW			
RIVIT									
APPROVATO DA \ APPROVED BY:		DATA:	DUREZZA \ HARDNESS:	FOGLIO\ SHEET:	FORMATO FOGLIO: SHEET FORMAT:	A4			METODO 1 (ISO 128) METHOD 1 (ISO 128)
RIVIT				1 OF 1					
			PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	