
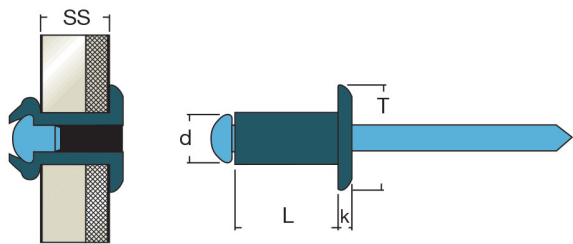


ITEM TECHNICAL CARD



hole diameter (mm)	4,0
d - rivet diameter	3,9
T - head width (mm)	8,0
L - rivet length (mm)	14,0
k - head thickness (mm)	1,0
shear strength (N)	1800
tensile strength (N)	2800
grip range (mm)	8,0 ÷ 11,0
body material	cupronickel
mandrel material	stainless steel A2
head type	dome

DESCRIZIONE \ DESCRIPTION:					CATEGORIA \ CATEGORY:		1215400.06000	
XIT-Blind rivet Cupronickel/Stainless steel 304 DH 3,9x14,0								
MATERIAL \ MATERIAL:			TRATTAMENTO TERMICO \ HEAT TREATMENT:				NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY:		DATA:	TRATT. SUPERFICIALE\ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:			
RIVIT								
CONTROLLATO DA \ CHECKED BY:		DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:			NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
RIVIT								
APPROVATO DA \ APPROVED BY:		DATA:	DUREZZA \ HARDNESS:	FOGLIO\ SHEET:	FORMATO FOGLIO:	METODO 1 (ISO 128) METHOD 1 (ISO 128)	REVISIONE: REVISION:	 FASTENERS & TOOLS  RIVIT.IT
RIVIT				1 OF 1	SHEET FORMAT:			
			PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT			
					Mod.P023_07			