


ITEM TECHNICAL CARD

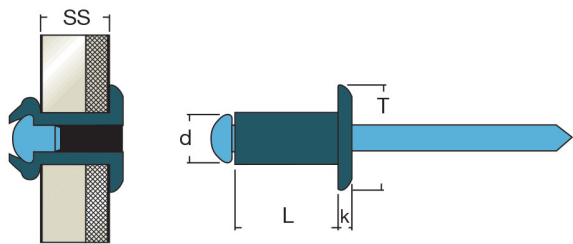

hole diameter (mm)	4,0
d - rivet diameter	3,9
T - head width (mm)	8,0
L - rivet length (mm)	20,0
k - head thickness (mm)	1,0
shear strength (N)	1800
tensile strength (N)	2800
grip range (mm)	14,0 ÷ 16,0
body material	cupronickel
mandrel material	stainless steel A2
head type	dome

DESCRIZIONE \ DESCRIPTION:				CATEGORIA \ CATEGORY:		1215900.04000									
XIT-Blind rivet Cupronickel/Stainless steel 304 DH 3,9x20,0															
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:				NOTE \ NOTES:									
ESEGUITO DA \ DRAWN BY: RIVIT		DATA:		TRATT. SUPERFICIALE\ SURF. TREATMENT:				Rugosità superficiale generale: General surface roughness:							
CONTROLLATO DA \ CHECKED BY: RIVIT		DATA:		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW									
APPROVATO DA \ APPROVED BY: RIVIT		DATA:		DUREZZA \ HARDNESS:		FOGLIO\ SHEET: 1 OF 1		FORMATO FOGLIO: SHEET FORMAT:		A4		METODO 1 (ISO 128) METHOD 1 (ISO 128)		REVISIONE: REVISION:	
				PESO \ WEIGHT:		Scale \ SCALE:		CARTIGLIO \ FORMAT Mod.P023_07							

**FASTENERS
& TOOLS**

RIVIT.IT