



ITEM TECHNICAL CARD

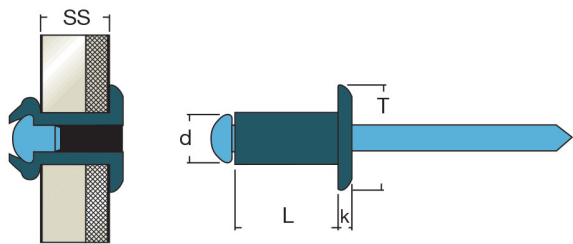

hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	9,5
L - rivet length (mm)	25,0
k - head thickness (mm)	1,0
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	17,0 ÷ 20,0
body material	cupronickel
mandrel material	stainless steel A2
head type	dome

DESCRIZIONE \ DESCRIPTION:					CATEGORIA \ CATEGORY:		1217100.00250	
XIT-Blind rivet Cupronickel/Stainless steel 304 DH 4,8x25,0								
MATERIAL \ MATERIAL:			TRATTAMENTO TERMICO \ HEAT TREATMENT:				NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY:		DATA:	TRATT. SUPERFICIALE\ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:			
RIVIT								
CONTROLLATO DA \ CHECKED BY:		DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:			NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
RIVIT								
APPROVATO DA \ APPROVED BY:		DATA:	DUREZZA \ HARDNESS:	FOGLIO\ SHEET:	FORMATO FOGLIO:	METODO 1 (ISO 128) METHOD 1 (ISO 128)		REVISIONE: REVISION:
RIVIT				1 OF 1	SHEET FORMAT:	A4		
			PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07			



FASTENERS
& TOOLS



RIVIT.IT