


ITEM TECHNICAL CARD




T - head width (mm)	8,0
L2 - shank length after fixing (mm)	7,5 ÷ 8,5
L - rivet nuts lenght (mm)	13,0
k - head thickness (mm)	0,5
grip range (mm)	2,5 ÷ 4,5
axial proof load for thread (N)	11500
max clamping torque (Nm)	8.0
d - rivet nut pitch	M5
hole diameter	7,0
clamping torque for torque force (Nm)	1.5
shearing strength (N)	2000
body material	stainless steel A2

DESCRIZIONE \ DESCRIPTION: IRC-Z-A2-Rivsert Stainless steel A2 h.7,0 gr2,5-4, 5 knur. RH M5/045				CATEGORIA \ CATEGORY: 1237500.08000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:			
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 2	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

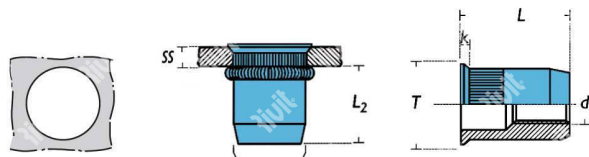

FASTENERS & TOOLS
RIVIT.IT

ITEM TECHNICAL CARD

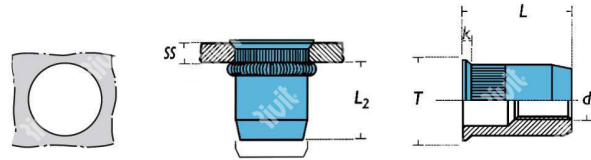

head type	reduced
shank type	open knurled cylindrical

DESCRIZIONE \ DESCRIPTION: IRC-Z-A2-Rivsert Stainless steel A2 h.7,0 gr2,5-4, 5 knur. RH M5/045				CATEGORIA \ CATEGORY: 1237500.08000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 2 OF 2	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	



**FASTENERS
& TOOLS**
RIVIT.IT