


ITEM TECHNICAL CARD



hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	9,5
L - rivet length (mm)	22,0
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	15,0 ÷ 17,0
body material	cupronickel
mandrel material	stainless steel A2
head type	countersunk

DESCRIZIONE \ DESCRIPTION: <b>XIS-Blind rivet Cupronickel/Stainless steel 304 CS KH9,0 4,8x22,0</b>		CATEGORIA \ CATEGORY: <b>1524200.03000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b>
		FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO \ SHEET FORMAT: <b>A4</b>
		CARTIGLIO \ FORMAT	

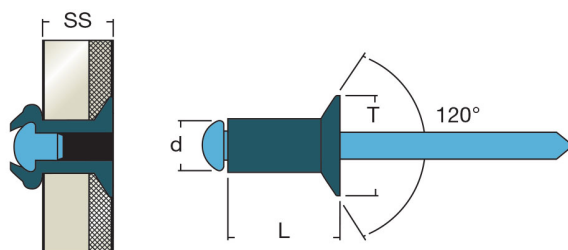

**FASTENERS  
& TOOLS**  
RIVIT.IT