


ITEM TECHNICAL CARD

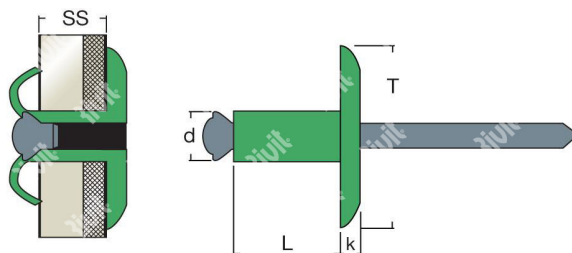

hole diameter (mm)	5,25
d - rivet diameter	5,0
T - head width (mm)	16,0
L - rivet length (mm)	25,0
k - head thickness (mm)	1,1
shear strength (N)	2000
tensile strength (N)	2400
grip range (mm)	14,0 ÷ 18,0
body material	aluminium
mandrel material	steel
head type	large

DESCRIZIONE \ DESCRIPTION: FIORIV16-Blind rivet Alu/Steel h.5,25 LH16 5,0x25,0 TL16			CATEGORIA \ CATEGORY: 1714300.00200	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
				METODO 1 (ISO 128) METHOD 1 (ISO 128)
				REVISIONE: REVISION:
				FASTENERS & TOOLS RIVIT.IT