


ITEM TECHNICAL CARD



length (mm)	30,0
Material	white zinc plated steel 8.8
Diameter	M16
UNI	5739
DIN	933
ISO	4017
k (mm)	10,0
Rules Description	hex cap screws fully threaded
s (mm)	24,0
e min (mm)	26,75
pitch	2

DESCRIZIONE \ DESCRIPTION: <b>Hex head bolt UNI 5739/DIN 933 8.8 - white zinc plated steel M16x30</b>		CATEGORIA \ CATEGORY: <b>20136ZB.00050</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>		NOTE \ NOTES:	
DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FUOGIO \ SHEET: <b>1 OF 1</b>
		PESO \ WEIGHT:	FORMATO FOGGIO: <b>A4</b>
		Scale \ SCALE:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
			CARTIGLIO \ FORMAT <b>Mod.P023_07</b>

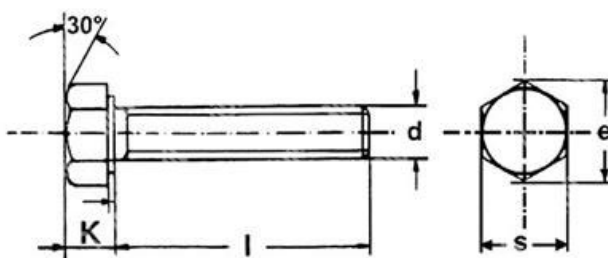

**FASTENERS  
& TOOLS**  
RIVIT.IT