


ITEM TECHNICAL CARD

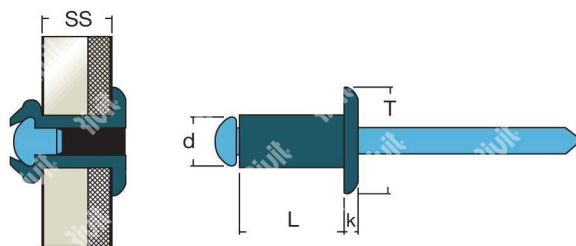

d - rivet diameter	4,8
L - rivet length (mm)	12,0
number of pieces in a pack	100
grip range (mm)	5,0 ÷ 7,0
body material	cupronickel
mandrel material	stainless steel A2
head type	dome

DESCRIZIONE \ DESCRIPTION: <b>XIT-BLISTRIV-Blind rivet Cupronickel/Stainless steel 304 DH (50pcs)</b>		CATEGORIA \ CATEGORY: <b>2404800.02000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>		NOTE \ NOTES:	
DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FUOGGIO \ SHEET: <b>1 OF 1</b>
		PESO \ WEIGHT:	FORMATO FOGGIO: <b>A4</b>
		Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
			METODO 1 (ISO 128) METHOD 1 (ISO 128)
			REVISIONE: REVISION:
			<b>FASTENERS &amp; TOOLS</b> RIVIT.IT