


ITEM TECHNICAL CARD



T - head width (mm)	10,0
L1 - shank length (mm)	11,0
L2 - shank length after fixing (mm)	6,0
k - head thickness (mm)	1,0
grip range (mm)	0,3 ÷ 2,4
axial proof load for thread (N)	10000
max clamping torque (Nm)	10
d - rivet nut pitch	M6
hole diameter	7,8
L ref.	10,0
body material	steel
head type	dome
shank type	cylindrical

DESCRIZIONE \ DESCRIPTION: <b>RIVBOLT-BFTC Male Rivet nut Steel h.7,8 ss0,3-2,4 CH M6x10</b>		CATEGORIA \ CATEGORY: <b>2586600.04000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: <b>1 OF 1</b>	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
		FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	

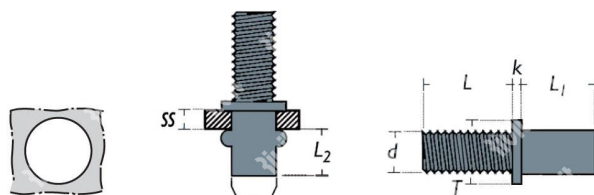

**FASTENERS  
& TOOLS**  
RIVIT.IT