


ITEM TECHNICAL CARD



T - head width (mm)	10,0
L1 - shank length (mm)	12,5
L2 - shank length after fixing (mm)	6,0
k - head thickness (mm)	1,0
grip range (mm)	2,5 ÷ 3,9
axial proof load for thread (N)	10000
max clamping torque (Nm)	10
d - rivet nut pitch	M6
hole diameter	7,8
L ref.	15,0
body material	steel
head type	dome
shank type	cylindrical

DESCRIZIONE \ DESCRIPTION: RIVBOLT-BFTC-Blind rivet nut flat head h.7,8 grip 2,5-3,9 ZP M6x15		CATEGORIA \ CATEGORY: 2586800.02500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		FOGLIO \ SHEET: 1 OF 1	REVISIONE: REVISION:
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07
		Scale \ SCALE:	

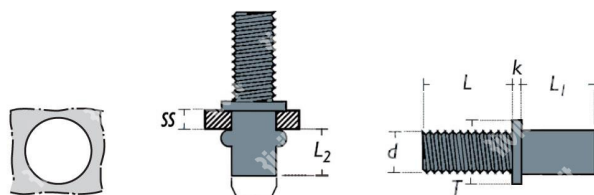

**FASTENERS
& TOOLS**
RIVIT.IT