


ITEM TECHNICAL CARD



length (mm)	50,0
Diameter	4,8
pitch	1,6
UNI	6950
DIN	3928
k (mm)	3,25
S (mm)	8,0
b (mm)	0,9
Rules Description	hexagon head tapping screws with collar
e min (mm)	8,71
d1 min (mm)	9,8
d1 max (mm)	10,5

DESCRIZIONE \ DESCRIPTION: Self-tapping screw UNI 6950 flanged hexagon head white zinc plated			CATEGORIA \ CATEGORY: 28728ZB	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	
		PESO \ WEIGHT:	Scale \ SCALE:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
			CARTIGLIO \ FORMAT Mod.P023_07	REVISIONE: REVISION:

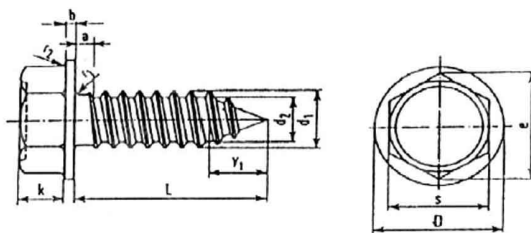

**FASTENERS
& TOOLS**
RIVIT.IT