


ITEM TECHNICAL CARD



stroke (mm)	30
stroke cycle (approx.)	1
traction strength	3890
overall length without head (mm)	475
air working pressure (bar)	6
min/max air pressure (bar)	5 - 7
weight (kg)	9
intensification ratio	32:1
noise level dB(A)	< 70
vibrations (m/s ²)	< 2,7
air volume required at 5,1bar (lt)	2,6
handle weight without kit (kg)	1,08

DESCRIZIONE \ DESCRIPTION: RIV300-Hydropneumatic tool for speed rivets without (kit available on		CATEGORIA \ CATEGORY: 3010800	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07
		FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		Scale \ SCALE:	

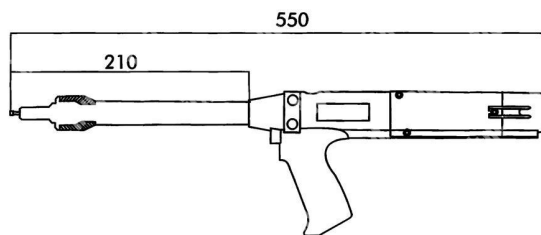

**FASTENERS
& TOOLS**
RIVIT.IT