


ITEM TECHNICAL CARD

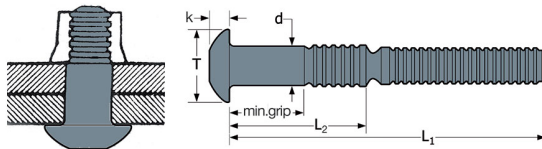

hole diameter (mm)	8,2 - 8,4
lockbolt diameter (mm)	8,0
T - head width (mm)	16,7
L1 - lockbolt length (mm)	56,0
L2 (mm)	21,8 - 23,5
K - head thickness (mm)	5,2
shear strenght (N)	29800
model	RLFT10-07
tensile strenght (N)	26700
grip range (mm)	7,9 ÷ 14,3

DESCRIZIONE \ DESCRIPTION: RIVLOCK-Lockbolt Steel DH d.8,0 gr 7,9-14,3 RLFT 10-7 d8		CATEGORIA \ CATEGORY: 3018600	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FUOGGIO \ SHEET: 1 OF 1 FORMATO FOGGIO: A4 SHEET FORMAT: A4
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07
		FASTENERS & TOOLS RIVIT.IT	