




ITEM TECHNICAL CARD

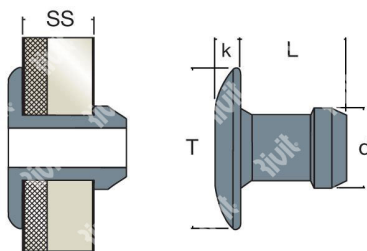

hole diameter (mm)	3,97 ÷ 4,04
d - rivet diameter	4,0
T - head width (mm)	8,0
L - rivet length (mm)	7,9
number of pieces in cartridge (pz)	34
k - head thickness (mm)	1,0
shear strength (N)	1600
tensile strength (N)	2800
grip range (mm)	4,7 ÷ 5,9
body material	steel
head type	dome

DESCRIZIONE \ DESCRIPTION: BRFT-Speedriv Steel in cartridge 34pcs DH gr 4,7-6 ,0 4,0x7,9			CATEGORIA \ CATEGORY: 3028200.15000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
				METODO 1 (ISO 128) METHOD 1 (ISO 128)
				REVISIONE: REVISION:
 FASTENERS & TOOLS  RIVIT.IT				