


ITEM TECHNICAL CARD

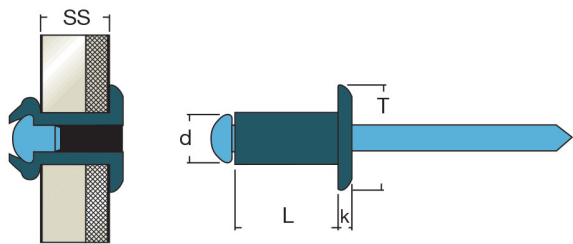

hole diameter (mm)	5,0
d - rivet diameter	4,8
T - head width (mm)	9,5
L - rivet length (mm)	45,0
k - head thickness (mm)	1,1
shear strength (N)	2800
tensile strength (N)	4500
grip range (mm)	35,0 ÷ 40,0
body material	cupronickel
mandrel material	stainless steel A2
head type	dome

DESCRIZIONE \ DESCRIPTION:				CATEGORIA \ CATEGORY:		3160600.00200	
XIT-Blind rivet Cupronickel/Stainless steel 304 DH 4,8x45,0							
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:				NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY:	DATA:	TRATT. SUPERFICIALE\ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:				
RIVIT							
CONTROLLATO DA \ CHECKED BY:	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]:		NON SCALARE IL DISEGNO			
RIVIT		HEAT TREATMENT (SURF) DEPTH [mm]:		DO NOT RESIZE THE DRAW			
APPROVATO DA \ APPROVED BY:	DATA:	DUREZZA \ HARDNESS:	FOGLIO\ SHEET:	FORMATO FOGLIO:	A4	METODO 1 (ISO 128)	REVISIONE:
RIVIT			1 OF 1	SHEET FORMAT:		METHOD 1 (ISO 128)	REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT	Mod.P023_07		