


ITEM TECHNICAL CARD



T - head width (mm)	18,2
L2 - shank length after fixing (mm)	5,0
L - rivet nuts lenght (mm)	25,2
k - head thickness (mm)	2,0
grip range (mm)	0,5 ÷ 8,0
axial proof load for thread (N)	490
max clamping torque (Nm)	28.0
d - rivet nut pitch	M8
hole diameter	14,5
body material	steel
head type	dome
shank type	open cylindrical

DESCRIZIONE \ DESCRIPTION: JACKRIV-Rivet nut Steel h.15,0 gr0,5-8,0 DH M8/L/L=25,2				CATEGORIA \ CATEGORY: 32124ZB.00200	
MATERIALE \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

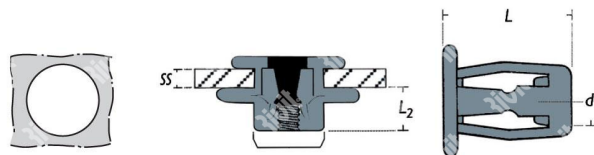

**FASTENERS
& TOOLS**
RIVIT.IT