


ITEM TECHNICAL CARD



|                   |   |
|-------------------|---|
| length (mm)       | 19,0                                    |
| Diameter          | 4,2                                     |
| pitch             | 1,4                                     |
| UNI               | 6950                                    |
| DIN               | 3928                                    |
| k (mm)            | 3,0                                     |
| S (mm)            | 7,0                                     |
| b (mm)            | 0,8                                     |
| Rules Description | hexagon head tapping screws with collar |
| e min (mm)        | 7,59                                    |
| d1 min (mm)       | 8,46                                    |
| d1 max (mm)       | 9,73                                    |

|   |       |  |   |  |
|---|-------|--|---|--|
| DESCRIZIONE \ DESCRIPTION:<br><b>Self-tapping screw UNI 6950 flanged hexagon head white zinc plated</b> |       |  | CATEGORIA \ CATEGORY:<br><b>33846ZB</b>                       |  |
| MATERIALE \ MATERIAL:   |       | TRATTAMENTO TERMICO \ HEAT TREATMENT:  |   | NOTE \ NOTES:  |
| ESEGUITO DA \ DRAWN BY:<br><b>RIVIT</b>   | DATA: | TRATT. SUPERFICIALE \ SURF. TREATMENT:   | Rugosità superficiale generale:<br>General surface roughness: |  |
| CONTROLLATO DA \ CHECKED BY:<br><b>RIVIT</b>  | DATA: | PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]:<br>HEAT TREATMENT (SURF) DEPTH [mm]: |   | <b>NON SCALARE IL DISEGNO<br/>DO NOT RESIZE THE DRAW</b> |
| APPROVATO DA \ APPROVED BY:<br><b>RIVIT</b>   | DATA: | DUREZZA \ HARDNESS:  | FOGLIO \ SHEET:<br><b>1 OF 1</b>                              |  |
|   |       | PESO \ WEIGHT:   | Scale \ SCALE:  | METODO 1 (ISO 128)<br>METHOD 1 (ISO 128)                 |
|   |       |  | CARTIGLIO \ FORMAT<br><b>Mod.P023_07</b>                      | REVISIONE:<br>REVISION:                                  |

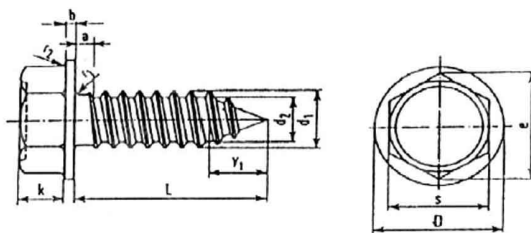

**FASTENERS  
& TOOLS**  
RIVIT.IT