


ITEM TECHNICAL CARD



air consumption x cycle 6 bar (lt)	2,6
stroke (mm)	20
max power at 6bar (N)	8500
air working pressure (bar)	5
min/max air pressure (bar)	3/7
weight (kg)	1,429
noise level dB(A)	77,5
vibrations (m/s ²)	< 2,5

DESCRIZIONE \ DESCRIPTION: RIV502-Hydropneumatic tool for rivets up to d.4,0 (all materials) and		CATEGORIA \ CATEGORY: 4102900	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: RIVIT		NOTE \ NOTES:	
DATA:		TRATT. SUPERFICIALE \ SURF. TREATMENT:	
CONTROLLATO DA \ CHECKED BY: RIVIT		Rugosità superficiale generale: General surface roughness:	
DATA:		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	
APPROVATO DA \ APPROVED BY: RIVIT		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
DATA:		DUREZZA \ HARDNESS:	
PESO \ WEIGHT:		FOGLIO \ SHEET: 1 OF 1	
Scale \ SCALE:		FORMATO FOGLIO: A4	
CARTIGLIO \ FORMAT		METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:	
Mod.P023_07			

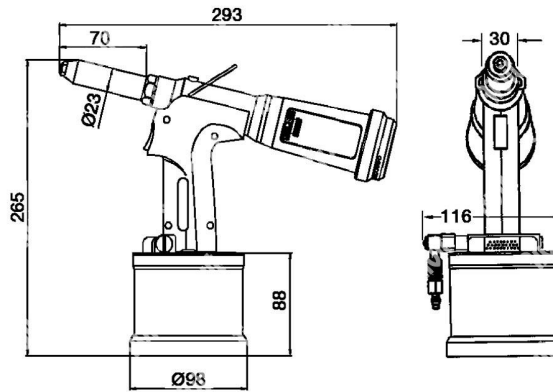

**FASTENERS
& TOOLS**
RIVIT.IT