


ITEM TECHNICAL CARD



air consumption x cycle 6 bar (lt)	5
stroke (mm)	6,5
max power at 6bar (N)	20000
air working pressure (bar)	6
min/max air pressure (bar)	5 - 7
noise level dB(A)	76,5
vibrations (m/s ²)	< 2,5
motor speed spin on (rpm)	2200 (6,5bar)
motor speed spin off (rpm)	1750 (6,5bar)
weight without kit (kg)	2,041
direct uncrewing speed (rpm)	1850 (6,5bar)

DESCRIZIONE \ DESCRIPTION: RIV938-Hydrop. tool for rivet nuts in a box, with force/pressure adj. (kit		CATEGORIA \ CATEGORY: 4143400	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: RIVIT		NOTE \ NOTES:	
DATA:		TRATT. SUPERFICIALE \ SURF. TREATMENT: Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	
APPROVATO DA \ APPROVED BY: RIVIT		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
DATA:		METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:	
PESO \ WEIGHT:		FOGLIO \ SHEET: 1 OF 1	
Scale \ SCALE:		FORMATO FOGLIO: A4	
		CARTIGLIO \ FORMAT Mod.P023_07	

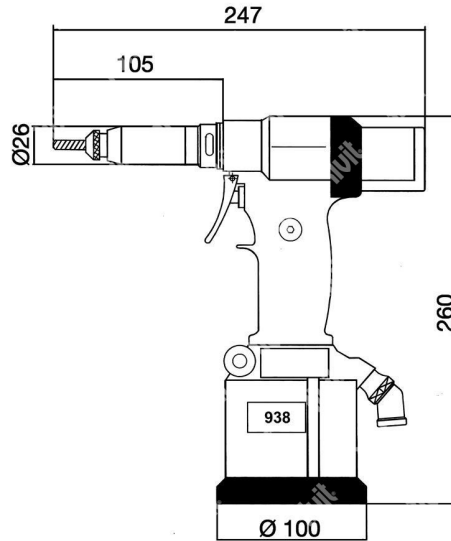

FASTENERS & TOOLS

RIVIT.IT