


ITEM TECHNICAL CARD



hole diameter (mm)	18,6 - 19,4
diameter (mm)	M16
model	RSCT160
L - length (mm)	22
minimum hole depth (mm)	27,0
A x h (mm)	20,0 x 1,5
a x h (mm)	16,0 x 2,0

DESCRIZIONE \ DESCRIPTION: RSCT-Bussola autofil. in AcciaioZin(x pressofuso) de.20x1,5 c/intagli		CATEGORIA \ CATEGORY: 4247300.00500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: 1 OF 1	CARTIGLIO \ FORMAT Mod.P023_07
		FORMATO FOGLIO: SHEET FORMAT: A4	REVISIONE: REVISION:

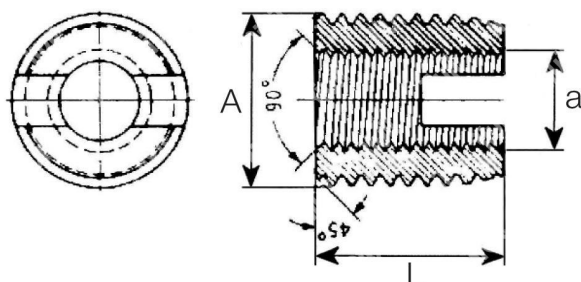

**FASTENERS
& TOOLS**
RIVIT.IT