


ITEM TECHNICAL CARD



air consumption x cycle 6 bar (lt)	5
stroke (mm)	6,5
max power at 6bar (N)	26600
air working pressure (bar)	6
min/max air pressure (bar)	5/7
noise level dB(A)	76
vibrations (m/s <sup>2</sup> )	< 2,5
motor speed spin on (rpm)	2200 (6,5bar)
motor speed spin off (rpm)	1750 (6,5bar)
weight without kit (kg)	2,200
direct uncrewing speed (rpm)	1850 (6,5bar)

DESCRIZIONE \ DESCRIPTION: <b>RIV939-Hydrop.tool for rivet nuts in a box, whitout kit force/pres.reg.</b>		CATEGORIA \ CATEGORY: <b>4621500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: <b>1 OF 1</b>	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
		FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	REVISIONE: REVISION:

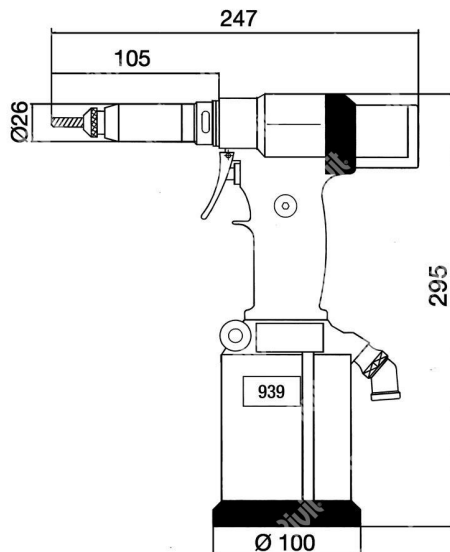

**FASTENERS  
& TOOLS**  
RIVIT.IT