


ITEM TECHNICAL CARD



hole diameter (mm)	2,36 ÷ 2,44
d - rivet diameter	2,4
model	BRAT24060
T - head width (mm)	4,0
L - rivet length (mm)	6,0
number of pieces in cartridge (pz)	65,0
k - head thickness (mm)	1,0
shear strength (N)	250,0
tensile strength (N)	400,0
grip range (mm)	3,2 ÷ 4,4
body material	aluminium
head type	dome

DESCRIZIONE \ DESCRIPTION: BRAT-Speedriv Alu in cartridge 44pcs DH gr.3,2-4,4 2,4x6,0				CATEGORIA \ CATEGORY: 5076500.25000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

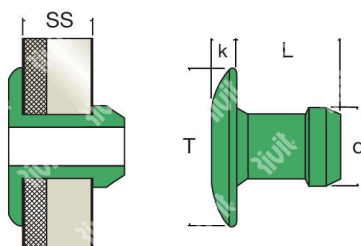

**FASTENERS
& TOOLS**
RIVIT.IT