


ITEM TECHNICAL CARD

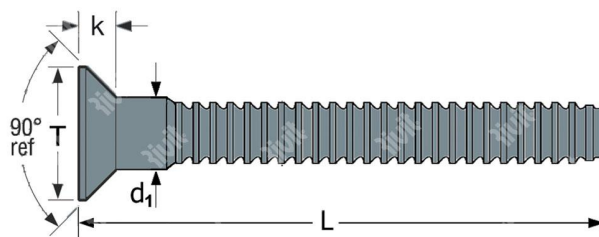

hole diameter (mm)	5,0 - 5,2
lockbolt diameter (mm)	4,8
T - head width (mm)	9,3
L - bolt length (mm)	48,0
K - head thickness (mm)	2,6
shear strenght (N)	7500
model	RGFS06-10
tensile strenght (N)	7300
grip range (mm)	3,6 ÷ 16,0

DESCRIZIONE \ DESCRIPTION: <b>RIVLOCKGRIP-Steel blind bolt CSKH d.4,8 gr.2,4-15,9 RGFS 6-10</b>		CATEGORIA \ CATEGORY: <b>5294600</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FUOGIO \ SHEET: <b>1 OF 1</b> FORMATO FOGGIO: <b>A4</b> SHEET FORMAT: <b>A4</b>
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b> CARTIGLIO \ FORMAT:
		 <b>FASTENERS &amp; TOOLS</b>  <b>RIVIT.IT</b>	